



SPECIALPROGRAMMA


Type AS

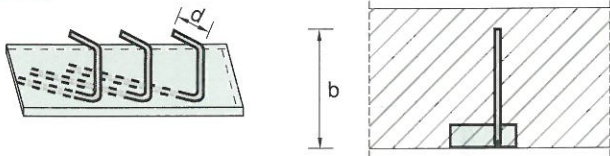


Type ES

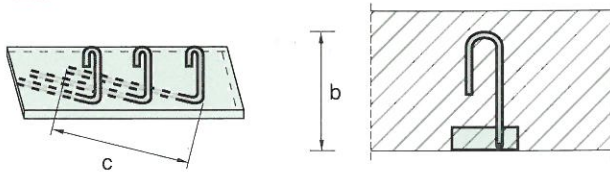


Type V

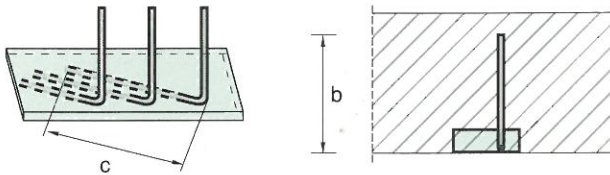


Type US

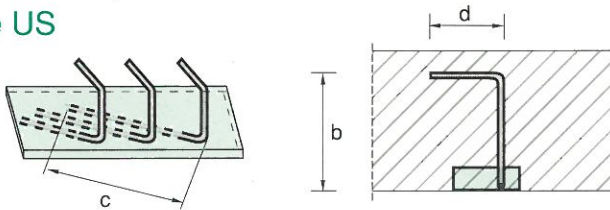


Type DS

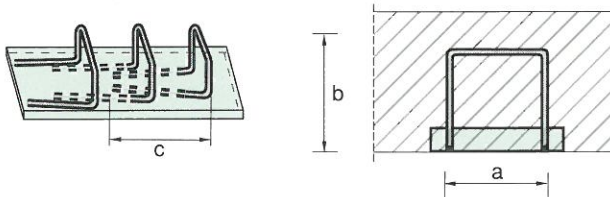

Type KS

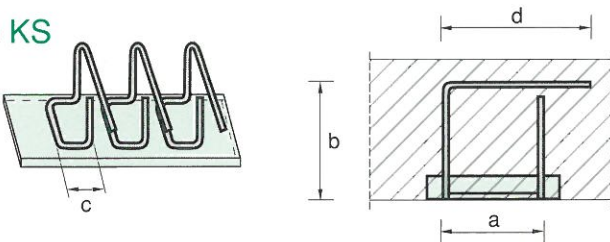


Type LS

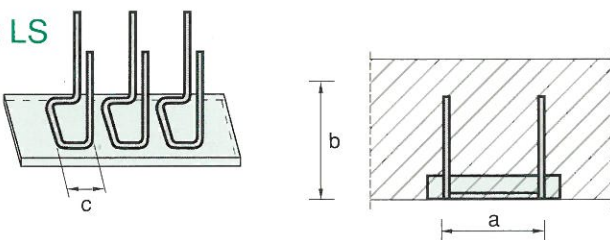


BASISPROGRAMMA


A 50

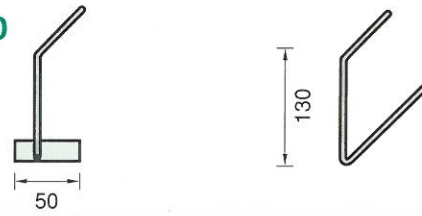


E 50

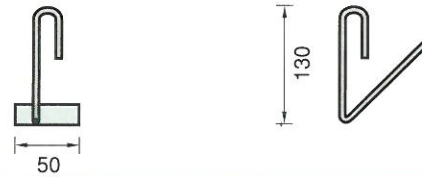


E 80

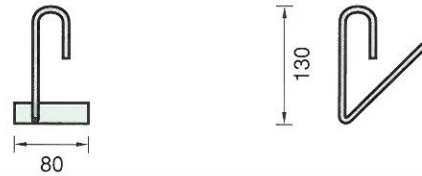


D 110

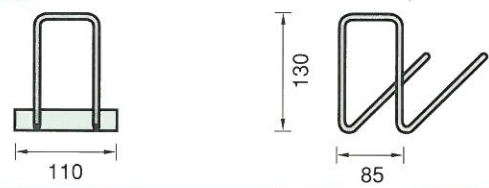


D 140

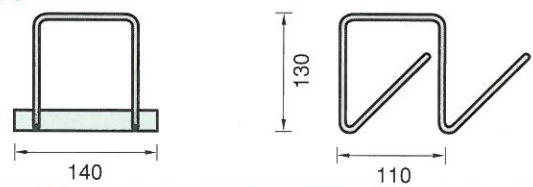


D 170

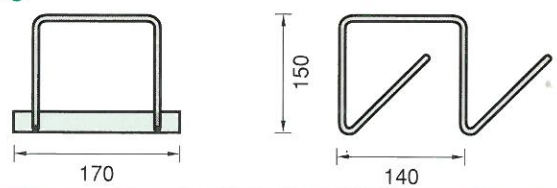


D 200

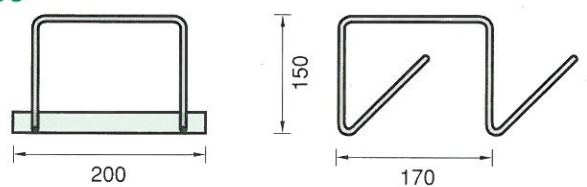

D 230

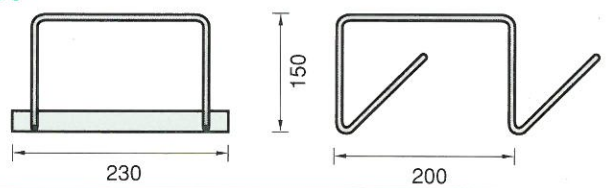

D 260

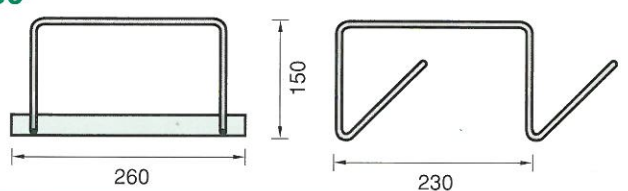

a beugelbreedte

b beugelhoogte

c steklengte


d steklengte (type AS-US-KS)

e beugelafstand

f bakdikte

g baklengte

DETAIL ALGEMEEN

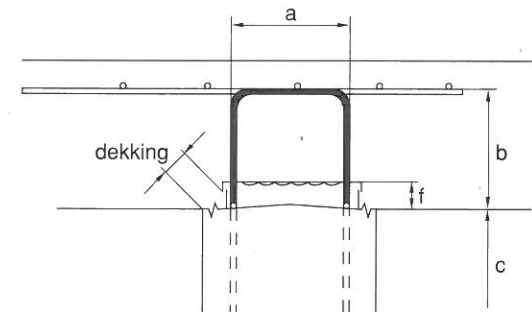

DETAIL OPLEGNEUS (KS/LS)

